





FEA ELEC
FEI NAL LCD

NIC C ,L D
LIE F M CHINA

FDCC1602H

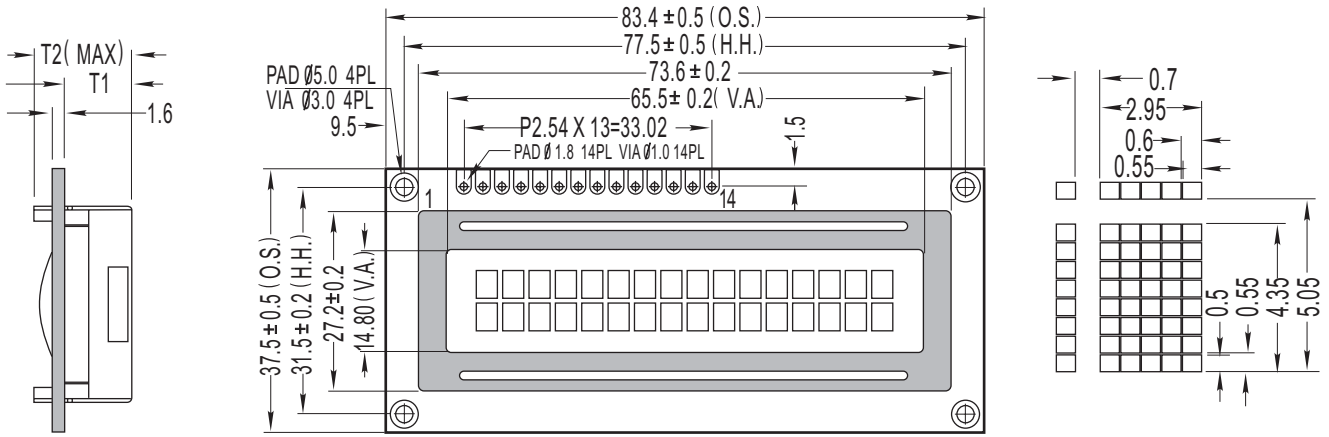

ITEM	T1	T2
LED backlight	8.6	13.5
EL / without backlight	4.6	9.5

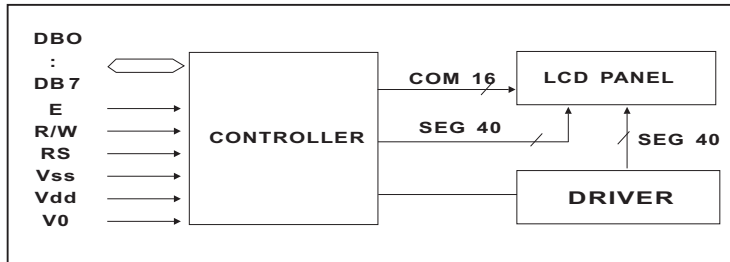

FEA E

1. 5X8 dots with cursor
2. Built-in controller (SPLC780D or Equivalent)
3. +5V power supply (Also available for +3.0V)
4. 1/16 duty cycle
5. N.V. Optional

MECHANICAL SPECIFICATIONS

CHARACTER NUMBER	16W X 2H	—
OVERALL SIZE	83.40W X 37.50H	mm
VIEWING AREA	65.50W X 14.80H	mm
HOLE - HOLE	77.50W X 31.50H	mm
CHARACTER SIZE	2.95W X 4.35H	mm
CHARACTER PITCH	0.70W X 0.70H	mm
DOT SIZE	0.50W X 0.55H	mm
DOT PITCH	0.05W X 0.05H	mm

ABNORMAL MOUNTING

ITEM	SYMBOL	MIN	MAX	UNIT
POWER SUPPLY (LOGIC)	Vdd	-0.3	7.0	V
POWER SUPPLY (LCD)	V0	Vdd-13.5	Vdd+0.3	V
INPUT VOLTAGE	Vin	-0.3	Vdd+0.3	V

ELECTRICAL CHARACTERISTICS

ITEM	SYMBOL	CONDITION	STANDARD			UNIT
			MIN	TYP	MAX	
Input voltage	Vdd	+5V	4.7	5.0	5.5	V
		+3.3V	2.7	3.0	3.3	V
Supply current	Idd	Vdd=5V	---	1.4	1.8	mA
Recommended LCD driving voltage for normal temp version module	Vdd-V0	0 °C	4.7	5.0	5.5	V
		25 °C	4.3	4.5	4.7	
		50 °C	4.1	4.3	4.5	
EL power supply current	EL	AC 400Hz VEL=110V	---	---	---	mA

INTERNAL PIN

PIN	SYMBOL	FUNCTION
1	Vss	GND
2	Vdd	Power Supply
3	V0	Contrast Adjust
4	RS	Register Select Signal
5	R/W	Data Read/Write
6	E	Enable Signal
7-14	DB0-DB7	Data Bus Line

DISPLAY ADDRESS CODE

Display position	1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16
DDRAM address	00 01 02 -- -- -- -- --
DDRAM address	40 41 42 -- -- -- -- --